Flange clamp

Toggle-locked end position, optional adjustment function

AFS 40

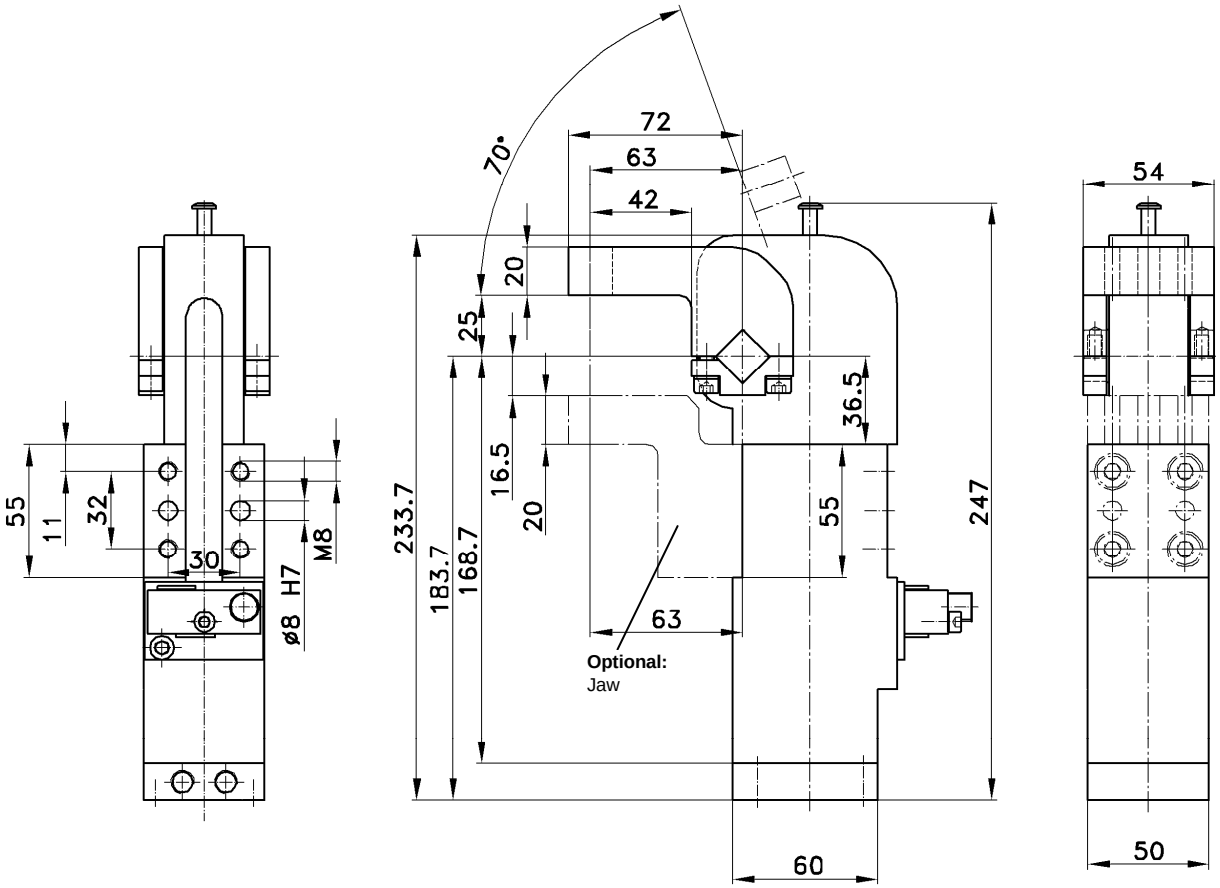

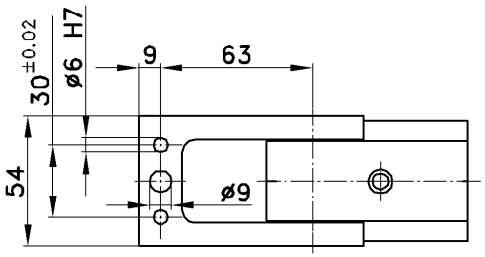

Clamp arm

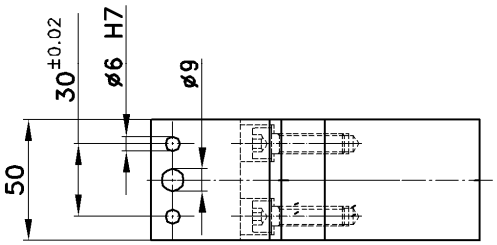

Optional:
Jaw

Order example:

AFS 40 N A30 T12 70°

AFS:	Type
40:	Piston Ø
N:	**Option:** Adjustment function
A30:	With clamp arm
T12:	Sensing system
70°:	Opening angle

Order key for Tünkers sensing systems:

...T00	Without sensing
... T12	Inductive sensing 24 V, 1 output with integrated LEDs

Clamp arm versions:

A00:	Without clamp arm
A30	With clamp arm
A31	With clamp arm and jaw

Opening angle:

Available up to max. 70°, other versions upon request!

*Tolerance of stud boreholes: ± 0.02, of threaded borings: ± 0.1.

Type	Holding force (N)	Clamping force (N)	Weight (kg)
AFS 40	4200	1650	2.2